


SERIES 1000 BRASS/POLYPRO


WIRING STYLE R
RECEPTACLE 3 PIN
HIRSCHMANN GSP 212

MOUNTING TYPE D
1" NPTx PG11 FEMALE

FACE VIEW MALE



PIN1-L1
PIN2-L1
GND-NOT USED

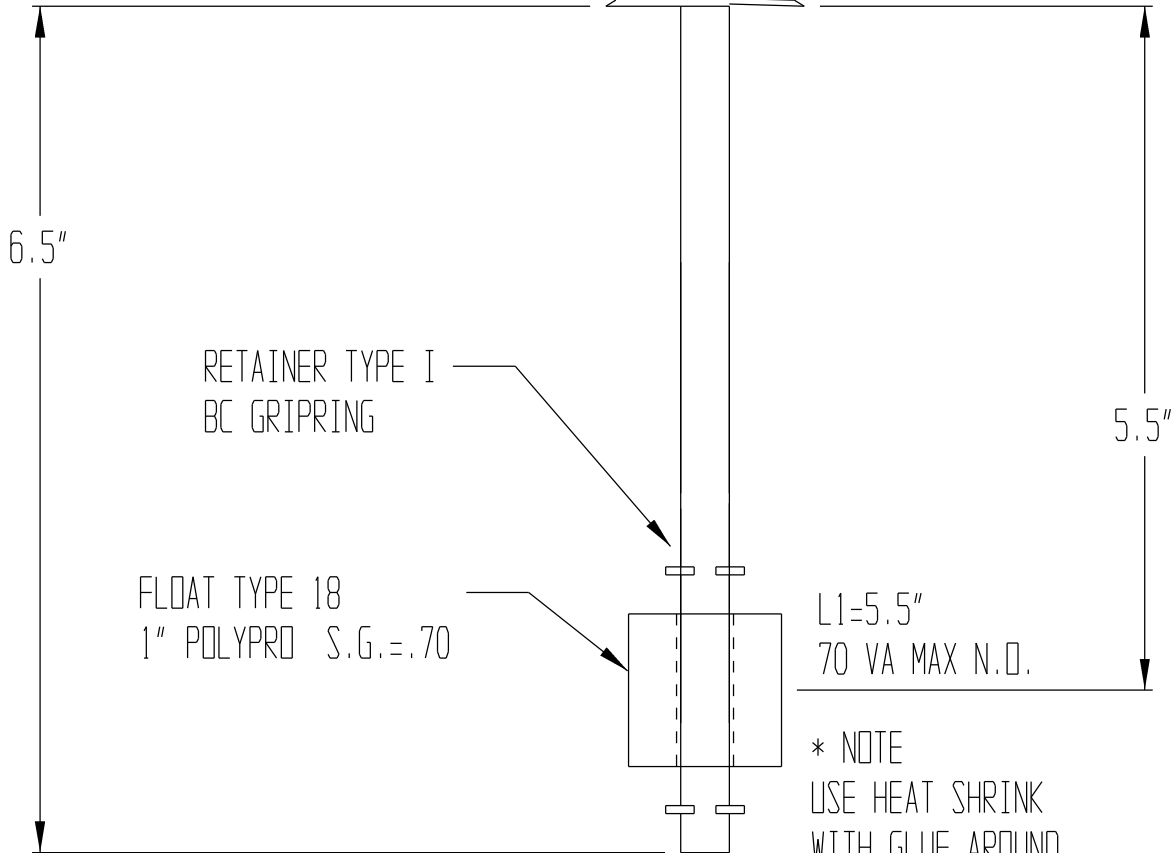


* NOTE
USE HEAT SHRINK
WITH GLUE AROUND
INTERNAL REED SWITCH

PLEASE NOTE:

THIS DRAWING AND SPECIFICATION IS THE PROPERTY OF INNOVATIVE COMPONENTS, LLC. AND IS TO BE USED SOLELY AS A TECHNICAL REFERENCE BY INNOVATIVE COMPONENTS' CUSTOMERS. ANY REPRODUCTION OR DISTRIBUTION TO THE CONTRARY IS PROHIBITED.

SIGNATURE OF APPROVAL _____ DATE _____
PRINT: _____
SIGN: _____



INNOVATIVE COMPONENTS
384 OLD TURNPIKE ROAD, P.O. BOX 294
SOUTHINGTON, CT. 06489

STANDARD TOLERANCES .000 = ± .010 .00 = ± .050 .0 = ± .100 0 = ± .200 ANGLES ± 5° TEMP 45°C	TITLE: BRASS & POLYPRO LEVEL SENSOR	
	MODEL: 12-0-1811	DRAWN BY: F. J. K.
	STOCK: 92174	DATE: 07/15/99
	FILENAME: C:\CK7\PR1\120-1811\92174A	SHEET: 1 OF 1 SCALE: NONE
		REV: