

## Standard Single Level – Horizontal – Stainless Steel


Ideal for high temperature and pressure applications. Rugged construction allows these units to be used for reliable switching in a wide variety of chemicals, oils and water in harsh environments.




SM-1000-SS






SM-1100-SS



SM90-1000-SS





SM90-1100-SS

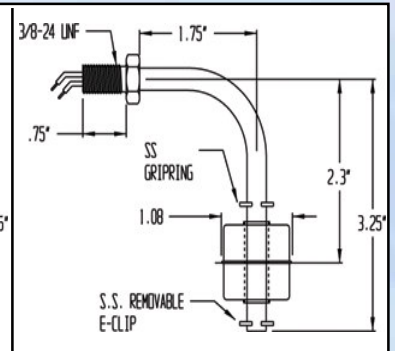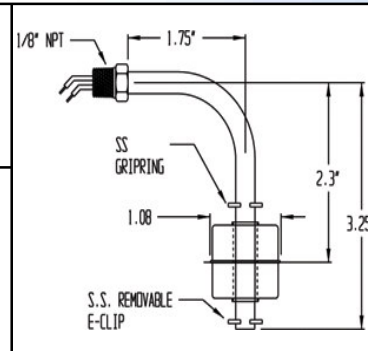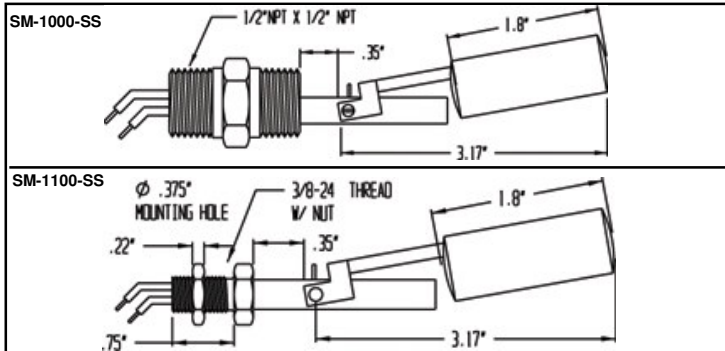


-Units are shipped N.O. unless otherwise specified. Switch state can be changed from N.O. to N.C. by inverting the float on the stem.  
 (N.O.- Normally Open - N.C.- Normally Closed)  
 -UL Recognized - File# E177423

Contact Rating	Type	Max Switching Voltage	Max Switching Current
70 VA / 50 W	SPST	150 VAC / 200 VDC	0.7A AC / 1.0A DC
100 VA	SPST	300 VAC / 350 VDC	1.0A AC / 2.5A DC
3 VA	SPDT	100 VAC / DC	0.25A AC/DC
50 VA	SPST	220 VDC	1.5 A
10 VA	SPST	200 VDC	0.5 A



### Color Code



Part#	Material	Reed Switch	S.G	Max Pressure	Operating Temp	Lead Wires
SM-1000-SS	Stainless Steel	70 VA SPST	.75	500 PSI	-40 TO 300°F	20 awg PVC 24"
SM-1100-SS						
SM90-1001-SS		70 VA SPST				
SM90-1003-SS		100 VA SPST				
SM90-1005-SS		3 VA SPDT				
SM90-1101-SS		70 VA SPST	.72	900 PSI		
SM90-1103-SS		100 VA SPST				
SM90-1105-SS		3 VA SPDT				

\* griplings are made from Stainless Steel grade PH 15-7MO

**Your Single Source for Float Type Level Switches**