


STAINLESS STEEL SINGLE LEVEL

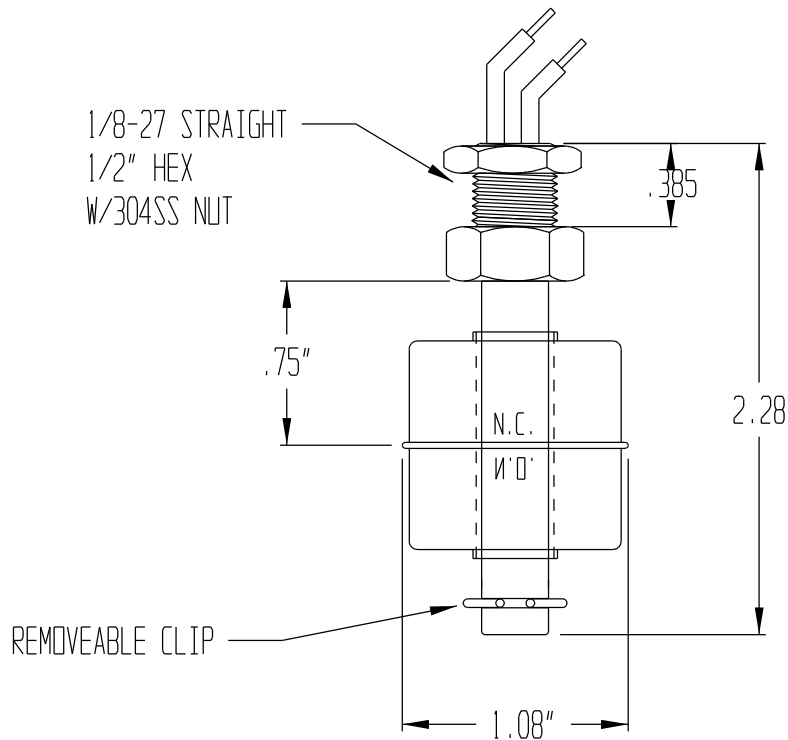

MATERIAL :

- RETAINER: 316 STAINLESS STEEL
- STEM: 316 STAINLESS STEEL
- FLOAT: 316 STAINLESS STEEL
- NUT: 304 STAINLESS STEEL
- REED SWITCH: 70VA SPST REVERSABLE

MIN SP.GR: 0.72

OPERATING TEMP: -40°F TO 300°F

MAX PRESSURE: 900 PSI

LEAD WIRES: 20 AWG PVC 24"


SWITCH OPERATION: REVERSIBLE NORMALLY OPEN OR CLOSED

U.L. RECOGNIZED FILE# E177423

PLEASE NOTE:

THIS DRAWING AND SPECIFICATION IS THE PROPERTY OF INNOVATIVE COMPONENTS AND IS TO BE USED SOLELY AS A TECHNICAL REFERENCE BY INNOVATIVE COMPONENTS' CUSTOMERS. ANY REPRODUCTION OR DISTRIBUTION TO THE CONTRARY IS PROHIBITED.

SIGNATURE OF APPROVAL	DATE
PRINT: _____	_____
SIGN: _____	_____



INNOVATIVE COMPONENTS

384 OLD TURNPIKE ROAD, P.O. BOX 294
SOUTHINGTON, CT. 06489

STANDARD TOLERANCES .000 = ± .010 .00 = ± .050 .0 = ± .100 0 = ± .200 ANGLES ± 5° TEMP ± 5°C	TITLE: STAINLESS STEEL SINGLE LEVEL	
	MODEL: LS-18-041/2	DRAWN BY: F.J.K DATE: 02/23/07
	STOCK: X	SHEET: 1 OF 1 SCALE: NONE
	FILENAME: C:\CK7\prt\LS-18-040	
		REV: A