


MERCURY CONTROL DUTY SWITCH

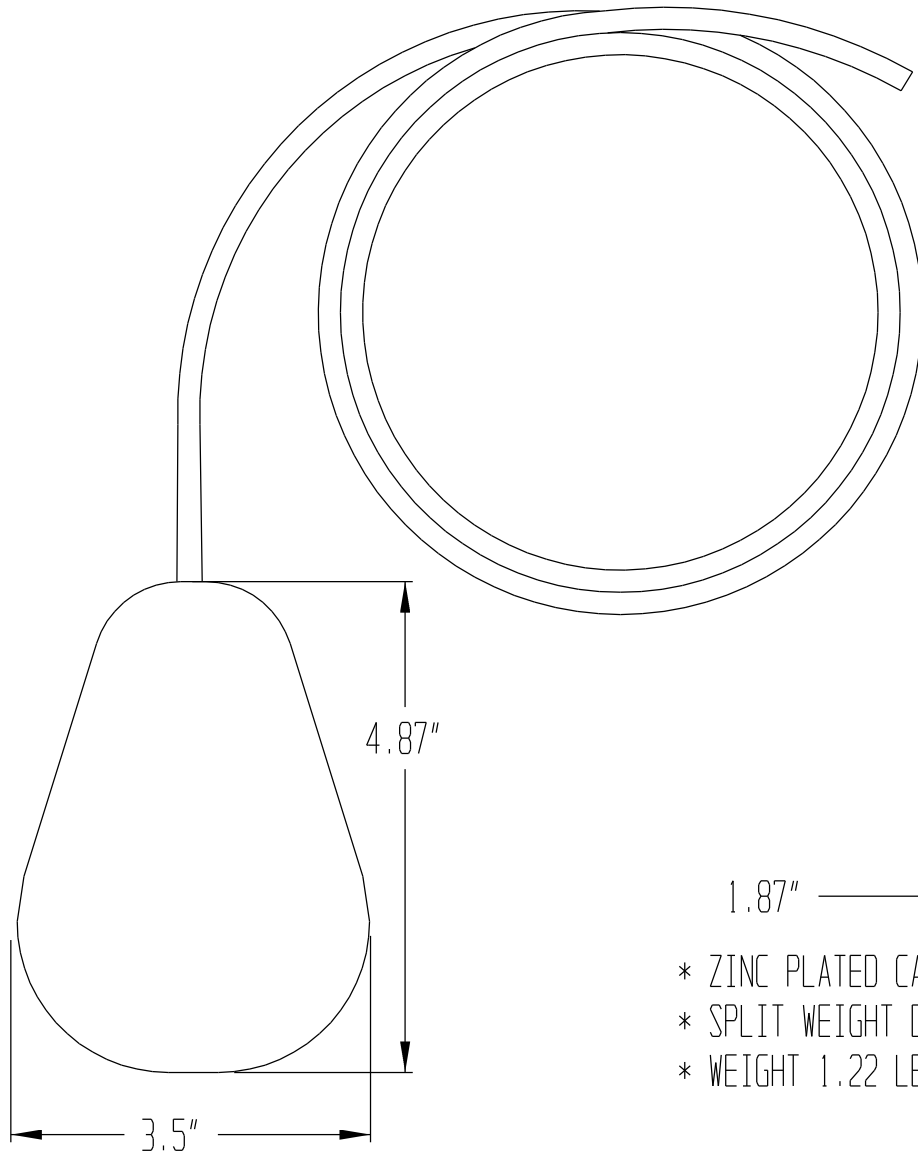


CORD LENGTH=20'

- * ZINC PLATED CAST IRON WEIGHT
- * SPLIT WEIGHT DESIGN FOR EASY ADJUSTMENT
- * WEIGHT 1.22 LBS

- * SOLID POLYURETHANE FLOAT-LEAK & SHOCK PROOF
- * MERCURY ACTIVATED PILOT DUTY CONTROL SWITCH
- * NARROW ANGLE FLOAT NOT SENSITIVE TO ROTATION
- * FOR USE IN WATER AND SEWAGE
- * NORMALLY CLOSED CONTACTS FOR PUMP UP APPLICATIONS
- * 18 AWG, 2 CONDUCTOR, SJOW WATER RESISTANT (CPE) MATERIAL
- * MAXIMUM 10 AMPS @120 VAC/240 VAC
- * 190°F MAX ±10%
- * OPTIONAL CORD LENGTH OF 10', 15', 20', 30', 50'
- * FOR USE ON CONTROL PANELS AND ALARM CIRCUITS ONLY
- * UL / CUL LISTED
- * 3 YEAR LIMITED WARRANTY

- **PUMP UP-N.C. CONTACTS FOR FILLING
- * NORMALLY CLOSE-OPEN ON RISE

	INNOVATIVE COMPONENTS 384 OLD TURNPIKE ROAD, P.O. BOX 294 SOUTHLINGTON, CT. 06489	
	TITLE: MERCURY SUMP PUMP SWITCH	
MODEL: SPS-250W-20	DRAWN BY: F.J.K. DATE: 12/08/03	
STOCK: X	SHEET: 1 OF 1 SCALE: NONE	
FILENAME: C:\CK7\PR\SPS-2000\1MASTER		REV: