



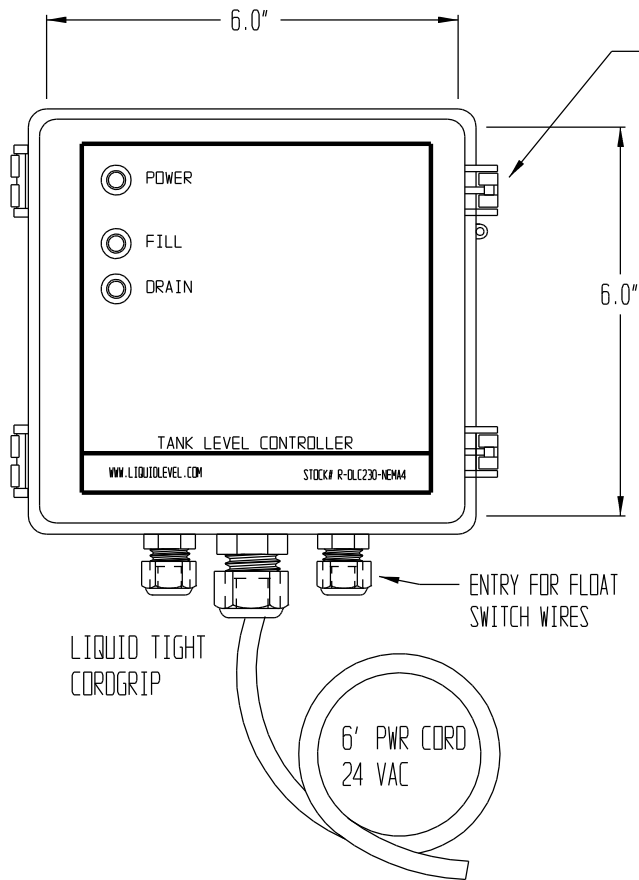

ABS PLASTIC ENCLOSURE
NEMA4X, IP66, WITH STAINLESS
STEEL WALL MOUNTING
BRACKETS & HARDWARE

RED-L1
YEL-L2
BLK-COM

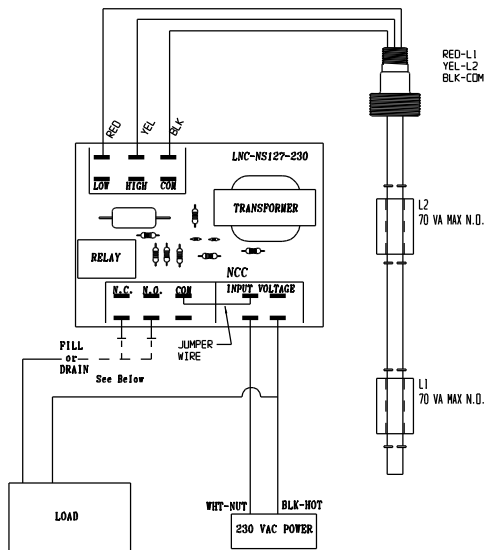


DRAIN WIRE TO N.O. CONTACT ON CIRCUIT BOARD:
PUMP ON HIGH LEVEL, DRAIN TANK

FILL WIRE TO N.C. CONTACT ON CIRCUIT BOARD:
PUMP ON LOW LEVEL, FILL TANK

PLEASE NOTE:

THIS DRAWING AND SPECIFICATION IS THE PROPERTY
OF INNOVATIVE COMPONENTS AND IS TO BE USED
SOLEY AS A TECHNICAL REFERENCE BY INNOVATIVE
COMPONENTS' CUSTOMERS. ANY REPRODUCTION OR
DISTRIBUTION TO THE CONTRARY IS PROHIBITED.

SIGNATURE OF APPROVAL	DATE
PRINT:	
SIGN:	

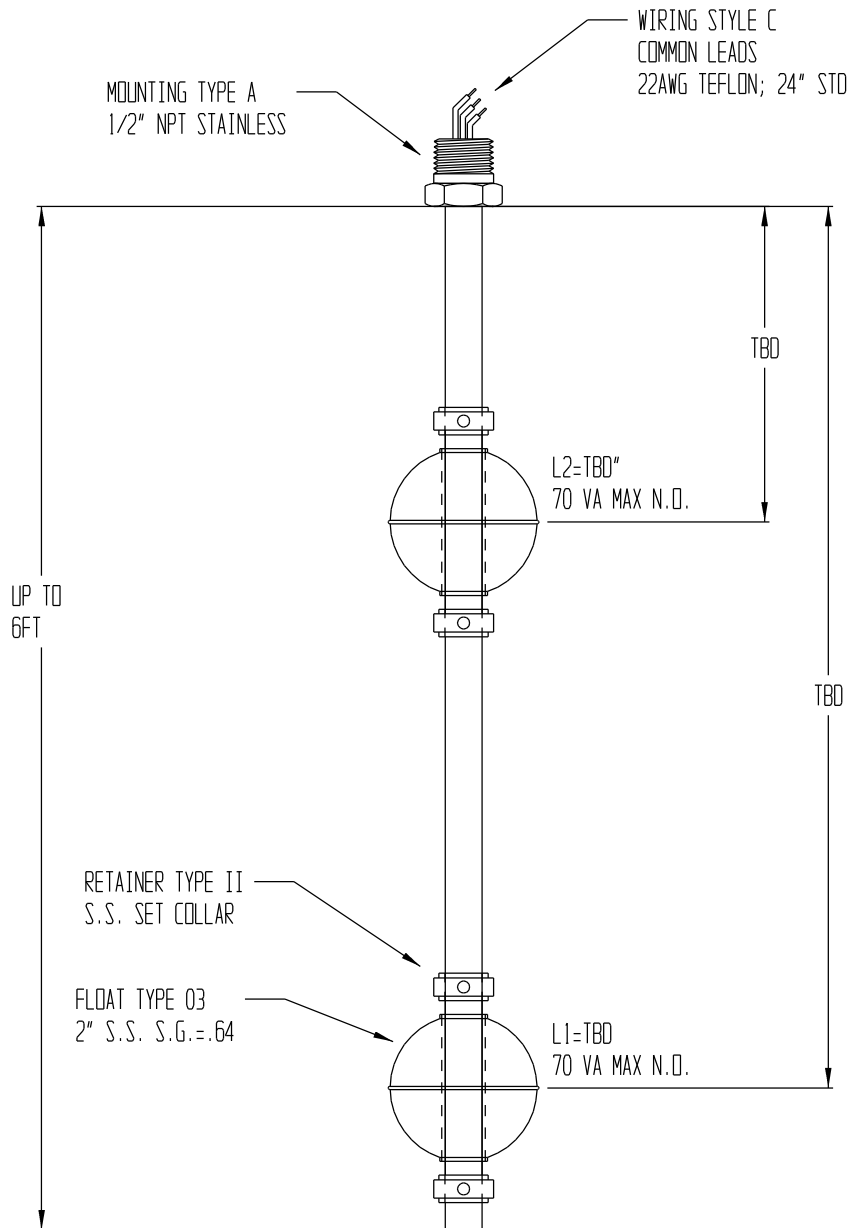

INNOVATIVE COMPONENTS

635 OLD TURNPIKE ROAD
PLANTSVILLE, CT. 06479

STANDARD TOLERANCES .000 = ± .010 .000 = ± .050 .0 = ± .100 0 = ± .200 ANGLES ± 5° TEMP ± 5°C	TITLE: DUAL LEVEL CONTROL RELAY PACKAGE	DRAWN BY: F.J.K
	MODEL: R-DLC-230 & MLS	DATE: 02/15/18
	STOCK: PKG-RDLC230-ML	SHEET: 1 OF 1
	FILENAME: C:\CK7\PR\	SCALE: NONE
		REV: