



ABS PLASTIC ENCLOSURE
NEMA4X, IP66, WITH STAINLESS
STEEL WALL MOUNTING
BRACKETS & HARDWARE

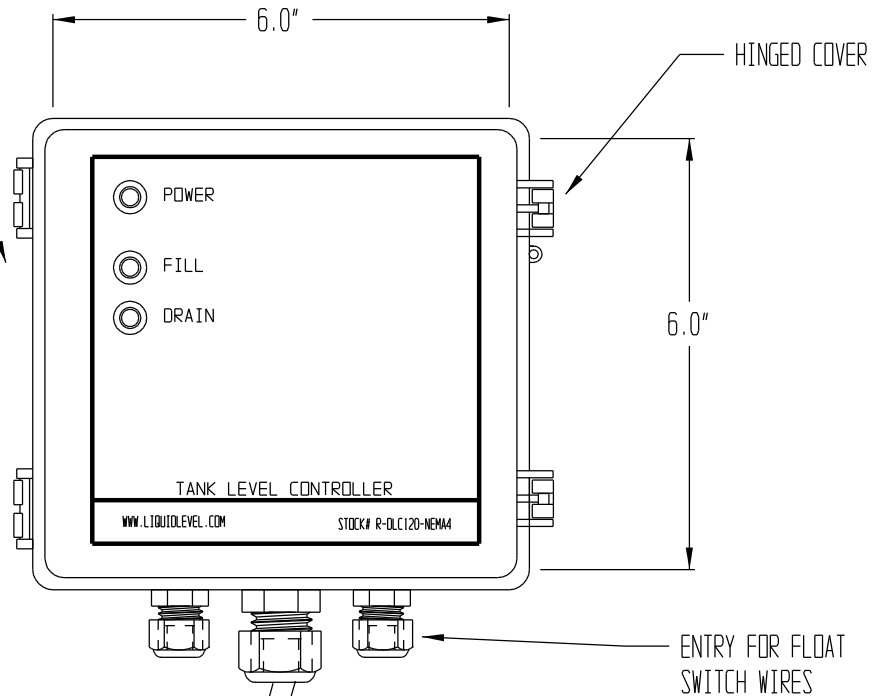

LIQUID TIGHT
CORDGRIP

120 VAC
6' PWR CORD

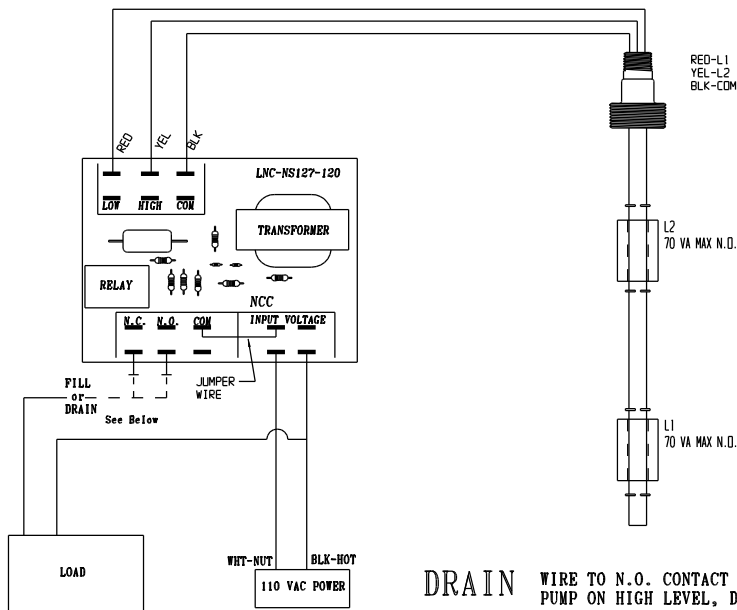

DRAIN

WIRE TO N.O. CONTACT ON CIRCUIT BOARD:
PUMP ON HIGH LEVEL, DRAIN TANK


FILL

WIRE TO N.C. CONTACT ON CIRCUIT BOARD:
PUMP ON LOW LEVEL, FILL TANK

PLEASE NOTE:

THIS DRAWING AND SPECIFICATION IS THE PROPERTY
OF INNOVATIVE COMPONENTS AND IS TO BE USED
SOLEY AS A TECHNICAL REFERENCE BY INNOVATIVE
COMPONENTS' CUSTOMERS. ANY REPRODUCTION OR
DISTRIBUTION TO THE CONTRARY IS PROHIBITED.

SIGNATURE OF APPROVAL	DATE
PRINT:	
SIGN:	



INNOVATIVE COMPONENTS

635 OLD TURNPIKE ROAD
PLANTSVILLE, CT. 06479

TITLE: DUAL LEVEL CONTROL RELAY-120VAC	
MODEL: R-DLC120-NEMA4	DRAWN BY: F.J.K
STOCK: R-DLC120-NEMA4	DATE: 09/21/17
	SHEET: 1 OF 1
	SCALE: NONE
FILENAME: C:\CK7\PR\T\CUST	REV:

STANDARD
TOLERANCES
.000 = ± .010
.00 = ± .050
.0 = ± .100
0 = ± .200
ANGLES ± 5°
TEMP 45°C