
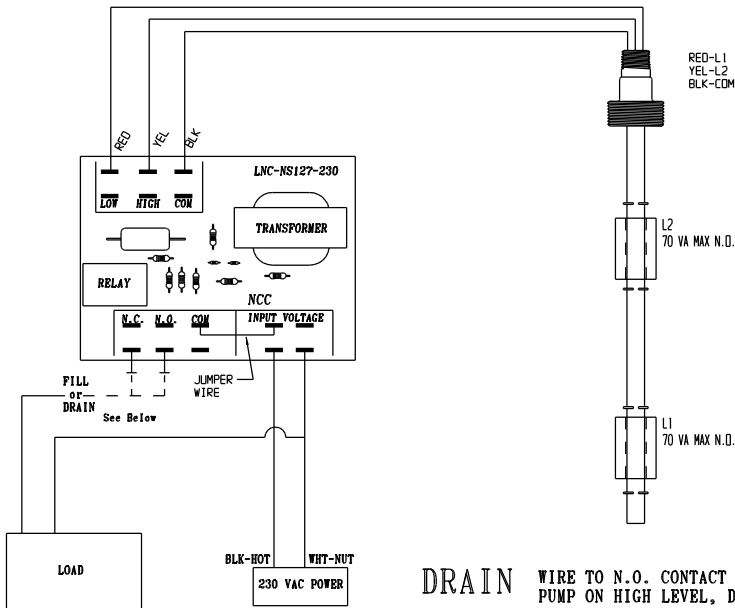


ABS PLASTIC ENCLOSURE
NEMA4X, IP66, WITH STAINLESS
STEEL WALL MOUNTING
BRACKETS & HARDWARE

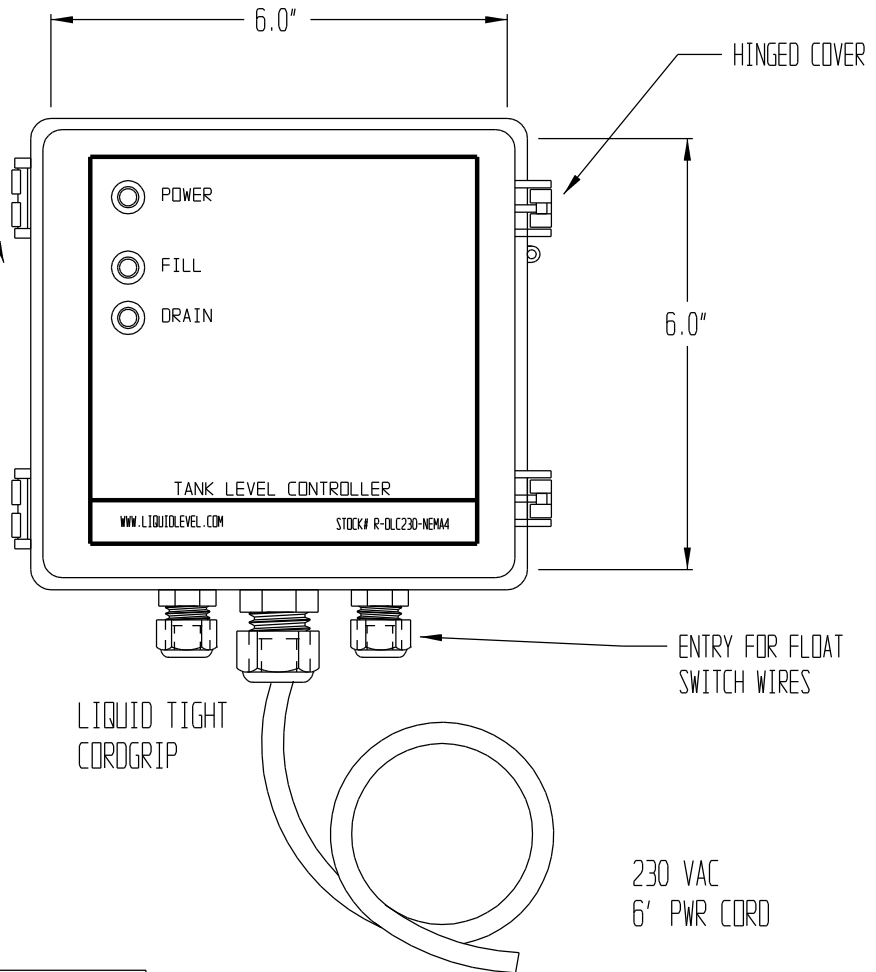

DRAIN WIRE TO N.O. CONTACT ON CIRCUIT BOARD:
PUMP ON HIGH LEVEL, DRAIN TANK

FILL WIRE TO N.C. CONTACT ON CIRCUIT BOARD:
PUMP ON LOW LEVEL, FILL TANK

PLEASE NOTE:

THIS DRAWING AND SPECIFICATION IS THE PROPERTY
OF INNOVATIVE COMPONENTS AND IS TO BE USED
SOLEY AS A TECHNICAL REFERENCE BY INNOVATIVE
COMPONENTS' CUSTOMERS. ANY REPRODUCTION OR
DISTRIBUTION TO THE CONTRARY IS PROHIBITED.

SIGNATURE OF APPROVAL	DATE
PRINT:	
SIGN:	

	INNOVATIVE COMPONENTS	
	635 OLD TURNPIKE ROAD PLANTSVILLE, CT. 06479	

TITLE: DUAL LEVEL CONTROL RELAY		
MODEL: R-DLC-230	DRAWN BY: F.J.K	
STOCK: R-DLC230-NEMA4	DATE: 07/07/04	
	SHEET: 1 OF 1	
	SCALE: NONE	
FILENAME: C:\CK7\PRJ\J-BOX	REV:	

STANDARD
TOLERANCES
.000 = ± .010
.00 = ± .050
.0 = ± .100
0 = ± .200
ANGLES ± 5°
TEMP 45°C