



-SENSOR IS A THREE WIRE POTENTIOMETER
 -SIGNAL CONDITIONER OR DIGITAL PANEL METER
 REQUIRED FOR 4-20MA SIGNAL

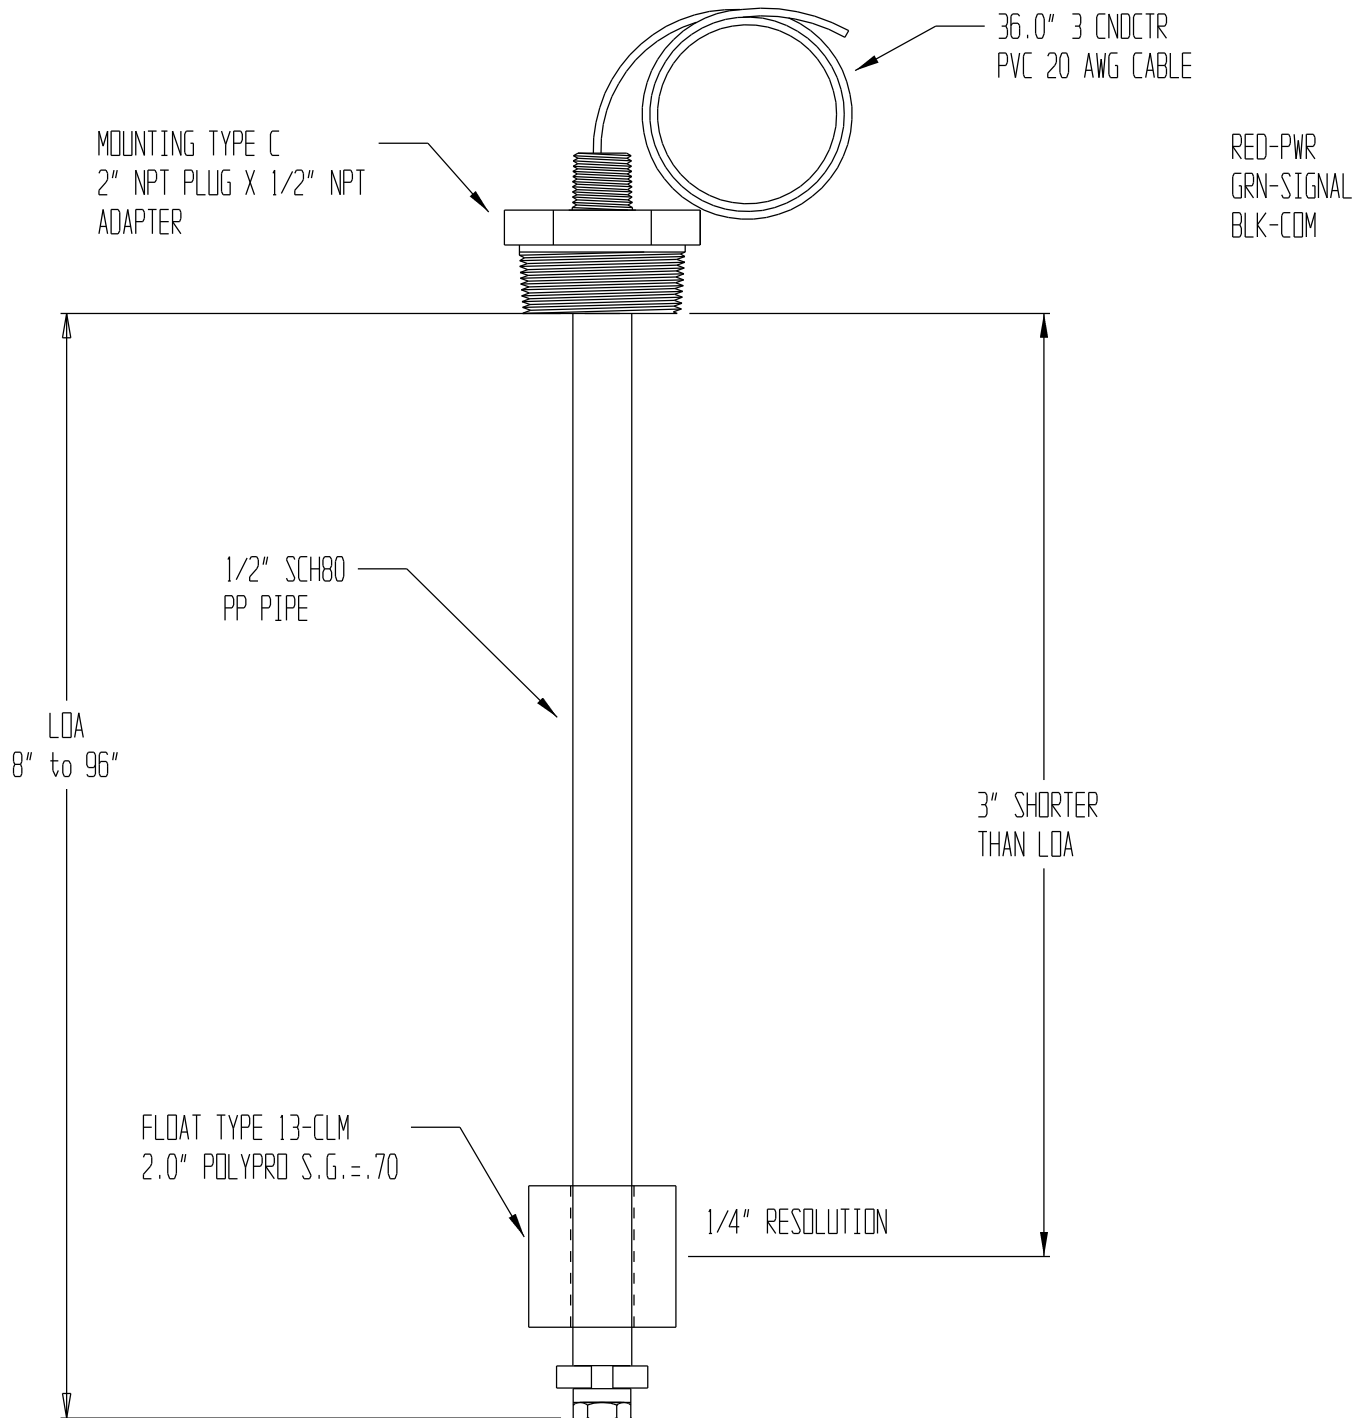

PLEASE NOTE:

THIS DRAWING AND SPECIFICATION IS THE PROPERTY OF INNOVATIVE COMPONENTS AND IS TO BE USED SOLEY AS A TECHNICAL REFERENCE BY INNOVATIVE COMPONENTS' CUSTOMERS. ANY REPRODUCTION OR DISTRIBUTION TO THE CONTRARY IS PROHIBITED.

SIGNATURE OF APPROVAL	DATE
PRINT: _____	
SIGN: _____	

	INNOVATIVE COMPONENTS 635 OLD TURNPIKE ROAD PLANTSVILLE, CT. 06479	
	TITLE: CONTINUOUS LEVEL MONITOR	
	MODEL: CLM-2000-PP	DRAWN BY: F.J.K
	STOCK: X	DATE: 02/20/19
	FILENAME: C:\CADKEY7\PRY\CLM	SHEET: 1 OF 1
STANDARD TOLERANCES .000 = ± .010 .00 = ± .050 .0 = ± .100 0 = ± .200 ANGLES ± 5° TEMP ± 5°C	SCALE: NONE	REV: