


-SENSOR IS A THREE WIRE POTENTIOMETER
 -SIGNAL CONDITIONER OR DIGITAL PANEL METER
 REQUIRED FOR 4-20MA SIGNAL

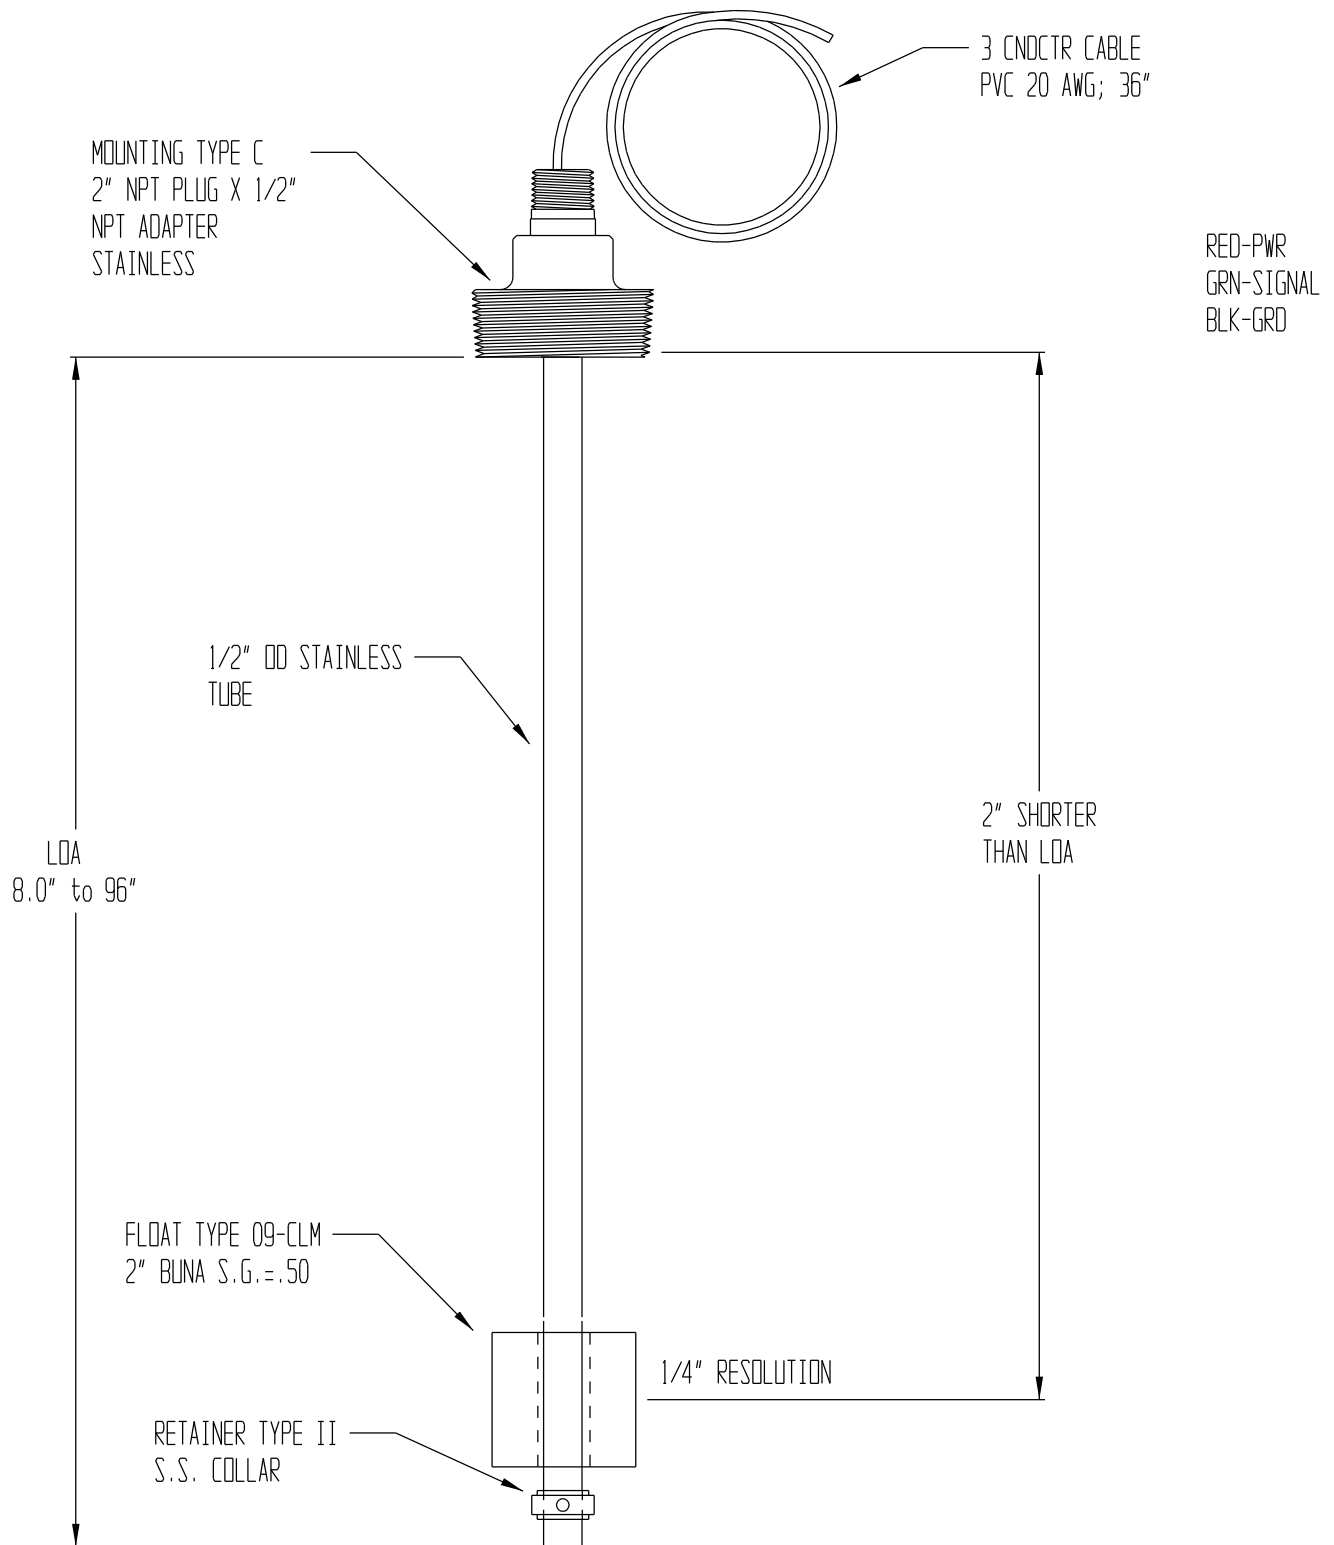

PLEASE NOTE:

THIS DRAWING AND SPECIFICATION IS THE PROPERTY
 OF INNOVATIVE COMPONENTS AND IS TO BE USED
 SOLEY AS A TECHNICAL REFERENCE BY INNOVATIVE
 COMPONENTS' CUSTOMERS. ANY REPRODUCTION OR
 DISTRIBUTION TO THE CONTRARY IS PROHIBITED.

SIGNATURE OF APPROVAL	DATE
PRINT:	
SIGN:	

	INNOVATIVE COMPONENTS 635 OLD TURNPIKE ROAD PLANTSVILLE, CT. 06479	
	TITLE: STAINLESS & BUNA CONTINUOUS MONITOR	
	MODEL: CLM-2000-SB	DRAWN BY: F.J.K DATE: 03/27/19
	STOCK: X	SHEET: 1 OF 1 SCALE: NONE

STANDARD TOLERANCES .000 = ± .010 .00 = ± .050 .0 = ± .100 0 = ± .200 ANGLES ± 5° TEMP 45°C	FILENAME: C:\CK7\PR7\CLM	REV:
--	--------------------------	------