


# DRY CONTACT EMAIL SENDER

EXTRUDED ALUMINUM  
ENCLOSURE STANDS 1.1" TALL  
(4X) FLANGED MOUNTING HOLES

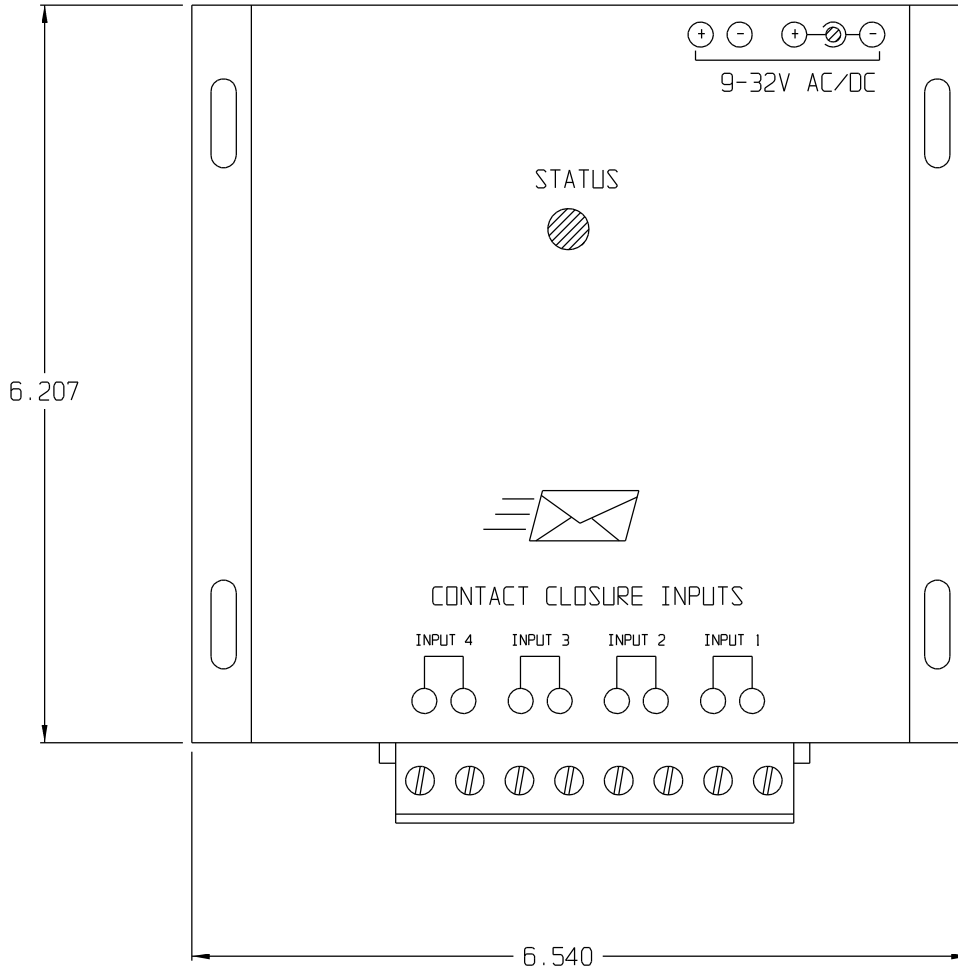

## FEATURES

- \*Send Email Alerts
- \*Multiple Recipients
- \*Works with your Existing Email Broker
- \*WiFi Interface No Software Required!
- \*Rugged Extruded Aluminum Enclosure
- \*Isolated Contact Closure Inputs
- Dual 9-32V DC Power Interface and RGB Status LED
- \*Pluggable Connectors for Power and Contact Closure input connections.

- \*WiFi 2.4ghz Wireless network connection required
- \*WiFi network passwords cannot contain special characters such as #%\$\* etc...

## PLEASE NOTE:

THIS DRAWING AND SPECIFICATION IS THE PROPERTY OF INNOVATIVE COMPONENTS AND IS TO BE USED SOLEY AS A TECHNICAL REFERENCE BY INNOVATIVE COMPONENTS' CUSTOMERS. ANY REPRODUCTION OR DISTRIBUTION TO THE CONTRARY IS PROHIBITED.

	<b>INNOVATIVE COMPONENTS</b> 635 OLD TURNPIKE ROAD PLANTSVILLE, CT. 06479	
	<b>TITLE: DRY CONTACT EMAIL SENDER</b>	
<b>MODEL: DCES-100</b>	<b>DRAWN BY: F.J.K</b> <b>DATE: 09/05/19</b>	
<b>STOCK: DCES-100</b>	<b>SHEET: 1 OF 1</b> <b>SCALE: NONE</b>	
<b>FILENAME: C:\CK7\PRT\RELAY\TLA-500</b>		<b>REV:</b>