

PART#  
R-OM12D-15DP - 12VDC

PIN OUT:  
PIN-13&14-COIL  
PIN-9&12-COMMON  
PIN-5&8-NORMALLY OPEN  
PIN-1&4-NORMALLY CLOSED

DIMENSIONS


L-1.06" x W-0.82" x H-1.65"

CURRENT RATINGS

RES: 120VAC 15A

RES: 28VDC 15A

DIAGRAM SHOWS LOAD WIRED  
TO COMMON AND NORMALLY OPEN  
CONTACTS.

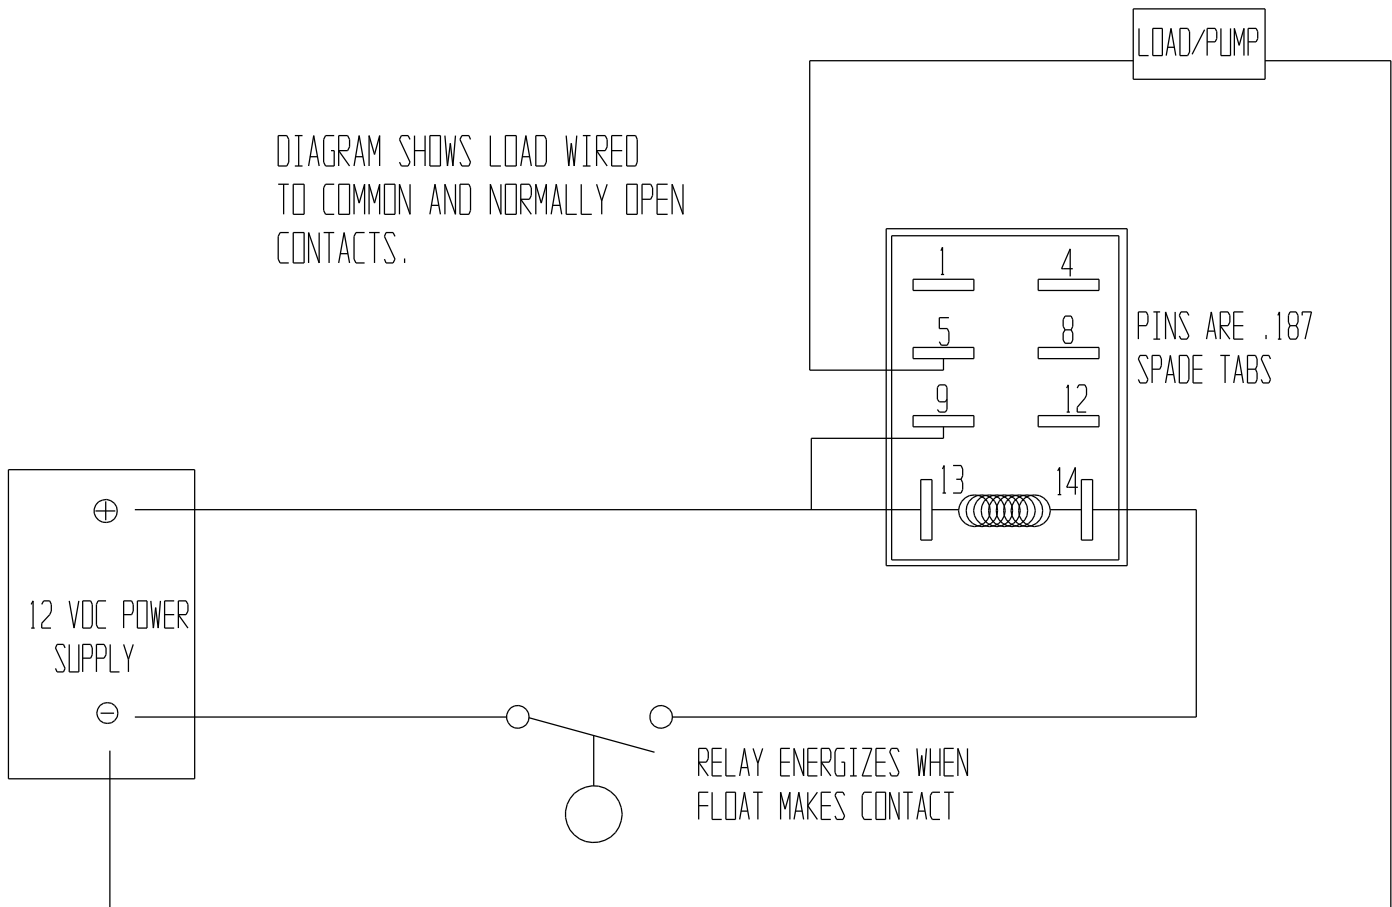

PLEASE NOTE:

THIS DRAWING AND SPECIFICATION IS THE PROPERTY OF INNOVATIVE COMPONENTS AND IS TO BE USED SOLEY AS A TECHNICAL REFERENCE BY INNOVATIVE COMPONENTS' CUSTOMERS. ANY REPRODUCTION OR DISTRIBUTION TO THE CONTRARY IS PROHIBITED.

	<b>INNOVATIVE COMPONENTS</b> 635 OLD TURNPIKE ROAD PLANTSVILLE, CT. 06479	
	<b>TITLE: RELAY WIRING DIAGRAM</b>	
MODEL: X	DRAWN BY: F.J.K. DATE: 003/26/19	
STOCK: R-OM12-15DP	SHEET: 1 OF 1 SCALE: NONE	
FILENAME: C:\CK7\PR\RELAY\R-KU-120SPDT		REV: