



5 PIN MALE MICRO AC
RECEPTACLE
MENCOM# MAC-5MR-PG9

SAE #16 HEX PLUG
STAINLESS WITH VITON O-RING
1-5/16-12 UNF THREAD



TOP VIEW MALE

PIN 1 = L1--RED/WHT
PIN 2 = L2--RED
PIN 3 = L3--GRN
PIN 4 = L4--RED/YEL
PIN 5 = COM--RED/BLK

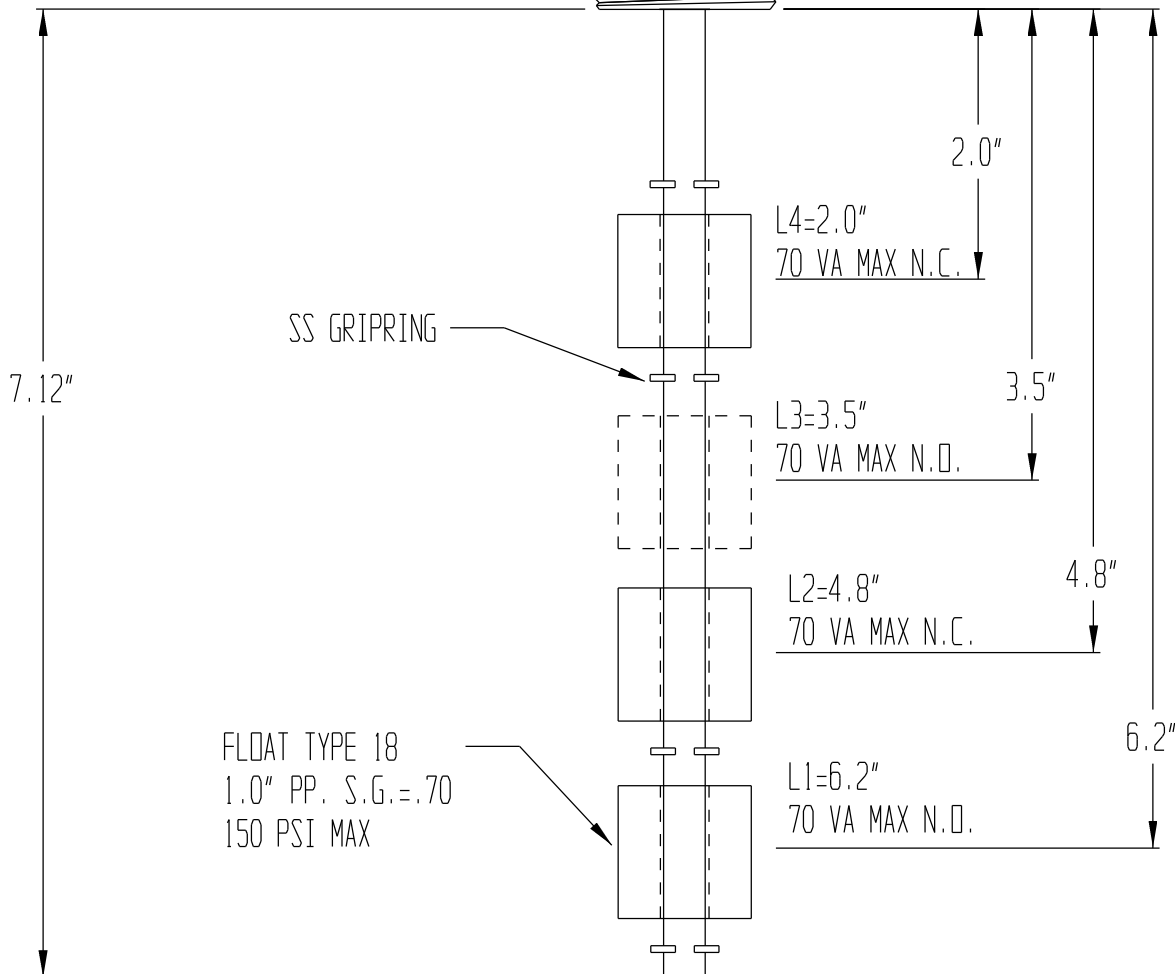

PLEASE NOTE:

THIS DRAWING AND SPECIFICATION IS THE PROPERTY
OF INNOVATIVE COMPONENTS, INC. AND IS TO BE USED
SOLEY AS A TECHNICAL REFERENCE BY INNOVATIVE
COMPONENTS' CUSTOMERS. ANY REPRODUCTION OR
DISTRIBUTION TO THE CONTRARY IS PROHIBITED.

SIGNATURE OF APPROVAL	DATE
PRINT:	
SIGN:	

	INNOVATIVE COMPONENTS 635 OLD TURNPIKE ROAD PLANTSVILLE, CT. 06479	
	TITLE: STAINLESS STEEL & POLYPROPYLENE	
	MODEL: 11-GG-1814	DRAWN BY: F.J.K
	STOCK: 92840-S	DATE: 08/17/20
	SHEET: 1 OF 1	
FILENAME: C:\CK7\PRTXCUST		REV:

STANDARD
TOLERANCES
.000 = ± .010
.00 = ± .050
.0 = ± .100
0 = ± .200
ANGLES ± 5°
TEMP ± 5°C